

C.F.F. SS · SERIES 316 STAINLESS STEEL VALVES

SS-13

FLANGED BALL


BALL VALVES

Available in Direct-Mount version
with ISO S211 mount pad



- Two Piece Body
- Body and Cap ASTM A351-CF8M
- Trim in ASTM 316
- Full Port, Solid Ball
- Actuator Mounting Pad
- Lever Operated
- PTFE Seats
- Flange to ANSI B16.5 Class 150
- Face to Face ANSI B16.10
- Anti-Static Device
- Repair Kits in Stock
- Blow-Out Proof Stem
- Also available in a class 300 version.

Manufactured in accordance with
ISO 9002 quality standards.
API607 File Safe Approved

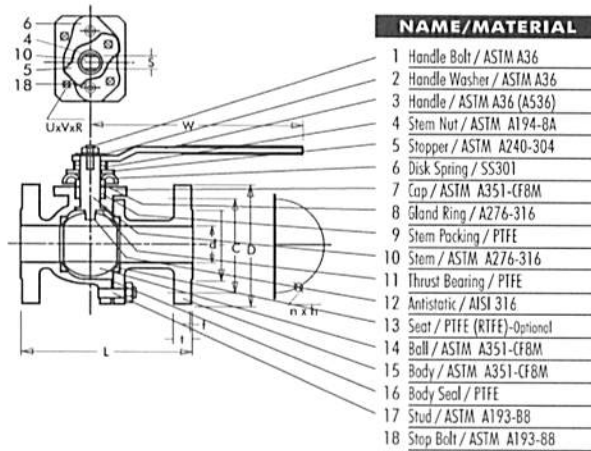

NAME/MATERIAL

- | | |
|----|-----------------------------|
| 1 | Handle Bolt / ASTM A36 |
| 2 | Handle Washer / ASTM A36 |
| 3 | Handle / ASTM A36 (A536) |
| 4 | Stem Nut / ASTM A194-8A |
| 5 | Stopper / ASTM A240-304 |
| 6 | Disk Spring / SS301 |
| 7 | Cap / ASTM A351-CF8M |
| 8 | Gland Ring / A276-316 |
| 9 | Stem Packing / PTFE |
| 10 | Stem / ASTM A276-316 |
| 11 | Thrust Bearing / PTFE |
| 12 | Antistatic / AISI 316 |
| 13 | Seat / PTFE (RTFE)-Optional |
| 14 | Ball / ASTM A351-CF8M |
| 15 | Body / ASTM A351-CF8M |
| 16 | Body Seal / PTFE |
| 17 | Stud / ASTM A193-B8 |
| 18 | Stop Bolt / ASTM A193-B8 |

Visit us on-line at:
www.cffstainless.com