


## Part #: BX012DSLA9KR

### 12 CHANNEL

### B-Series Breakout – Riser Rated Cables

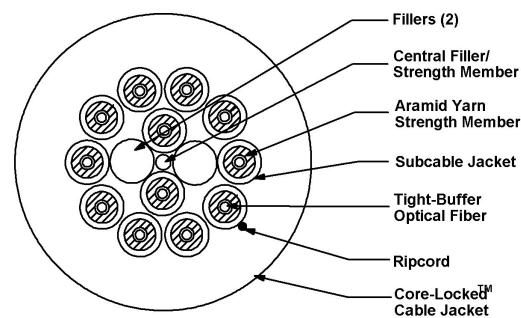

#### Laser Ultra-Fox™ Fiber Performance

Fiber Code	SLA
Industry Standard Designation	Bend Insensitive Low Water Peak Single Mode ITU-T G.657.A1 and ITU-T G.652.D
Core/Cladding Diameter (µm)	9/125
Wavelength (nm)	1310/1550
Maximum Cabled Attenuation (dB/km)	0.5/0.5
Primary Coating Diameter (µm)	245
Secondary Buffer Diameter (µm)	900
Zero Dispersion Slope (ps/nm <sup>2</sup> -km)	0.092
Proof Test Level (kpsi)	100

#### Mechanical and Environmental

Impact Resistance EIA/TIA-455-25A	1500 impacts
Crush Resistance TIA/EIA-455-41	2200 N/cm
Flex Resistance TIA-455-104	2000 cycles
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +85°C
Installation Temperature (actual temp. of cable)	-10°C to +60°C
Flame Retardancy	UL Listed Type OFNR (UL 1666) and FT4 (CSA C22.2 No. 232)

#### Installation and Operating Characteristics

	Installation	Operating
Max Tensile Load	6,000 N (1,350 lbs)	2,500 N (560 lbs)
Min Bend Radius	21.2 cm (8.3 in)	14.1 cm (5.6 in)

#### Cable Characteristics

Jacket Color	
Jacket Material	Indoor / Outdoor PVC
Buffer Material	2-Fiber Count - Hard Elastomeric; 4-72 Fiber Count - PVC
Subunit OD	2.5 mm
Cable Weight	159 kg/km (107 lbs/1000')
Cable Diameter	14.1 mm ( 0.56 in)

12 CHANNEL  
B-Series Breakout – Riser Rated Cables

Part #: BX012DSLA9KR



## Standards

Optical Cable Corporation Indoor/Outdoor tight-buffered fiber optic cables meet the functional requirement of the following standards:

- UL 1651
- UL 1666
- GR-409-CORE
- ICEA-S-104-696
- ICEA-S-83-596
- TIA-568
- TIA-598

## Applications

- Fiber Optic tray Cable: Suitable for use in cable trays
- Ideal for installations requiring an extremely rugged and reliable cable design where maximum mechanical and environmental protection are necessary
- Easiest cable to install where direct termination of the subcable to a connector and a direct run to panels and equipment are desired

## COST SAVINGS

- Direct termination to subcable may eliminate the need for patch panels and patch cords and reduces connector loss
- 900  $\mu$ m buffer eliminates the need for costly and time-consuming installation of fanout kits or pigtail splices because connectors terminate directly to the subcable
- High crush resistance may eliminate the need for innerduct

## Features

- High performance components and construction
- UL Listed in accordance with NEC sections 770.179(b) for use in vertical runs in building riser shafts or from floor to floor
- Most rugged and easy to install cable design for enterprise cabling applications
- Core-Locked™ outer jacket design for installation survivability and long-term, trouble free service
- Ideal for use in long, vertical installations
- 2.5mm subcables can be direct-terminated with standard connectors (2.0mm and 2.9mm subcables also available)
- Subcabled fiber is environmentally and mechanically protected
- Ideal for use in point-to-point runs in adverse environments
- Direct termination to subcable provides additional strain relief for better connector retention during moves, adds, and changes
- Design is ideal for direct pulling with mesh grips
- Cable materials are Indoor/Outdoor - UV, water and fungus resistant
- Wide operating temperature range of -40°C to +85°C
- High performance 900  $\mu$ m tight-buffered coating on each optical fiber for environmental and mechanical protection
- Interlocking armor can be applied to cables as an alternative to conduit installation
- 2 to 72 fibers