


**Tunable Semi-Solid Engine Mount**

Porsche 911

**READ BEFORE INSTALLATION**

The use of any Rennline product is the sole responsibility of the end user. Rennline Inc. accepts no responsibility for warranty voids or damage resulting from the use of these products. Due to the varying location of wiring harnesses and other components, carefully inspect any area prior to drilling. All Rennline products are intended for off road use only and should be installed by a qualified automotive technician.

ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	2	M24_A	BODY, ENGINE MOUNT, TUNEABLE SEMI SOLID
2	2	M24_B	HANGER, ENGINE MOUNT, TUNEABLE SEMI SOLID
3	2	M24_C	BASE, ENGINE MOUNT, TUNEABLE, SEMI SOLID
4	2	SB76_110	M12X1.5 X 110mm LG, FLANGED HHCS, 10.9
5	2	M24_GA	TOP POLY INSERT, 85 SHORE A HARD, RED, ENGINE MOUNT
6	2	M24_GB	BOTTOM POLY INSERT, 85 SHORE A HARD, RED, ENGINE MOUNT
7	2	M24_HA	TOP POLY INSERT, 75 SHORE A HARD, BLUE, ENGINE MOUNT
8	2	M24_HB	BOTTOM POLY INSERT, 75 SHORE A HARD, BLUE, ENGINE MOUNT
9	2	M24_IA	TOP POLY INSERT, 65 SHORE A HARD, YELLOW, ENGINE MOUNT
10	2	M24_IB	BOTTOM POLY INSERT, 65 SHORE A HARD, YELLOW, ENGINE MOUNT

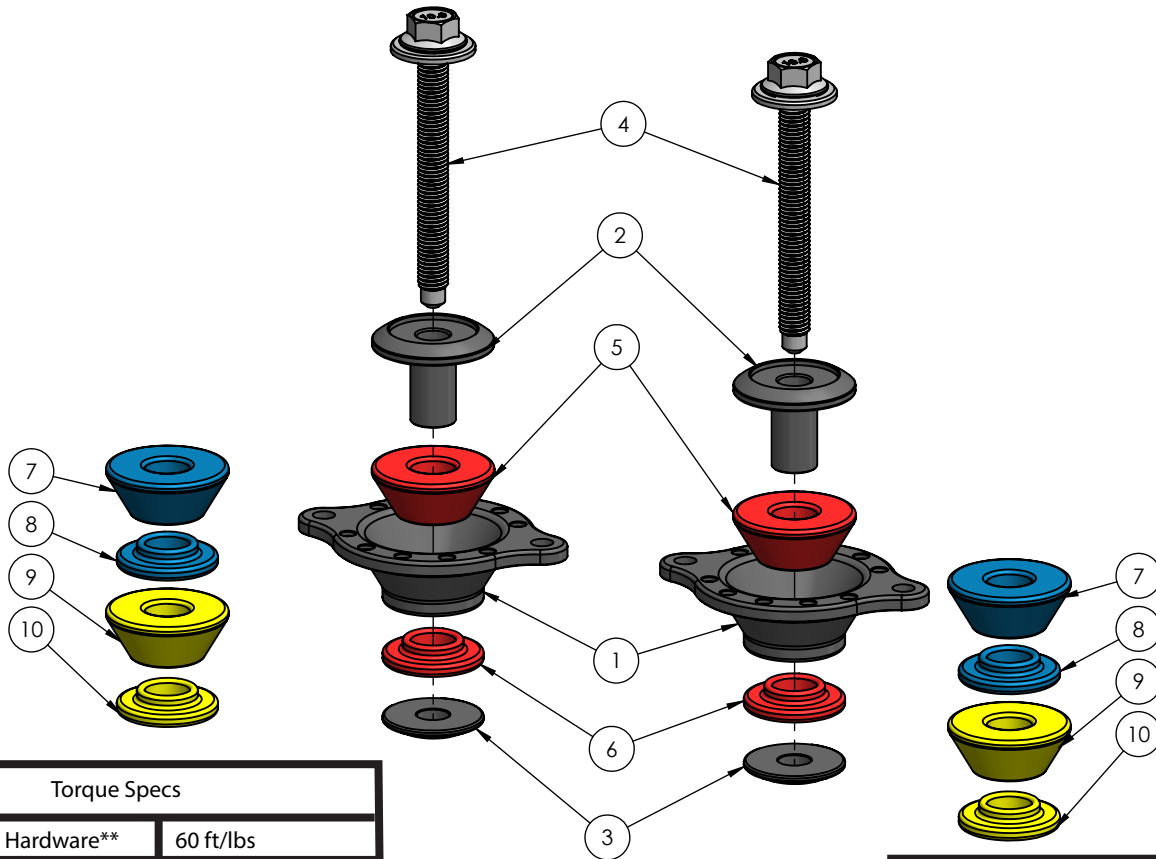

Torque Specs	
Factory M12 Hardware**	60 ft/lbs

\*\*Nut must be retorqued after first 100 miles

Insert Durometer	
Yellow	75A
Blue	85A
Red	95A